

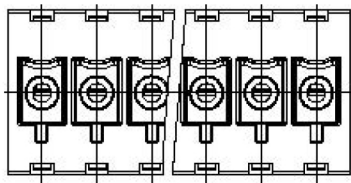


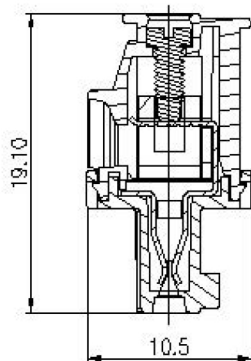

2EDGKB-3.5
2EDGKB-3.81

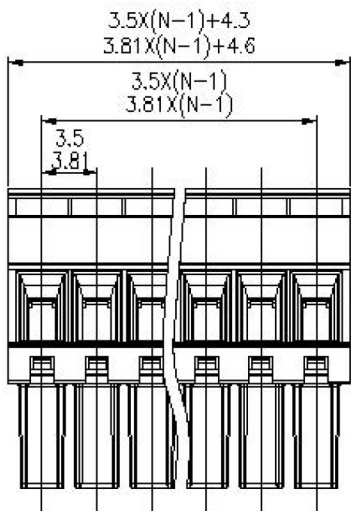

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Rated impulse voltage



UL

IEC

300V

250V

8A

7A

28-16AWG

0.5-1.5mm²

2.5KV

Mechanical

Torque

Ambient temperature

Strip length

Dimensions

Pitch

Poles

0.2Nm(1.7Lb-In)

-40℃~+105℃

7mm

3.5mm(.138") 3.81mm(.150")

2P-24P

Material

Housing

Screws

Contact

Cage

PA66,UL94V-0

M2,Steel,Cr³⁺Zn-plated

Phosphor bronze

Brass,Ni-plated

HOW TO ORDER :

- P - 1 - XXX
Customer Request



Series number

No. of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

2EDGKB-3.5, 2EDGKB-3.81