


康伟栅栏式PCB接线端子

产品规格书




HB635

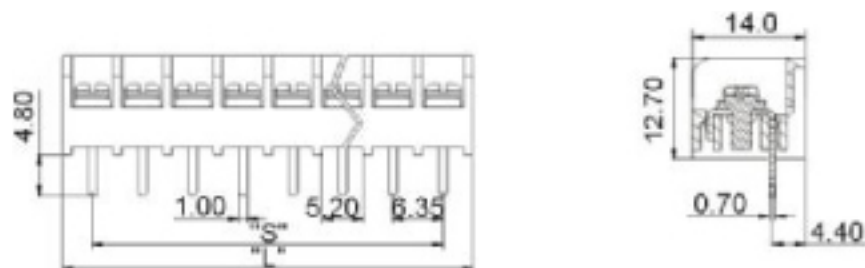

"S"=6.35x(P-1)
 "L"=6.35x(P-1)+7.60

认证	UL	CE
电气性能		
参考标准	UL	IEC
额定电压	300V	750V
额定电流	10A	17.5A
导线线径	22-16AWG	1.5mm ²
耐电压		AC2000V/1Min
绝缘阻抗		500MΩ/DC500V
机械性能		
最大锁紧扭力		0.4Nm 3.5Lb.in
环境温度		-40℃~+105℃
尺寸		
间距		6.35mm(.250")
极数		2P-24P
材质及电镀		
塑件		PA66, UL94V-0
端子		黄铜, 0.7厚 镀锡
螺丝		铜, M2.5螺帽

订购方式:

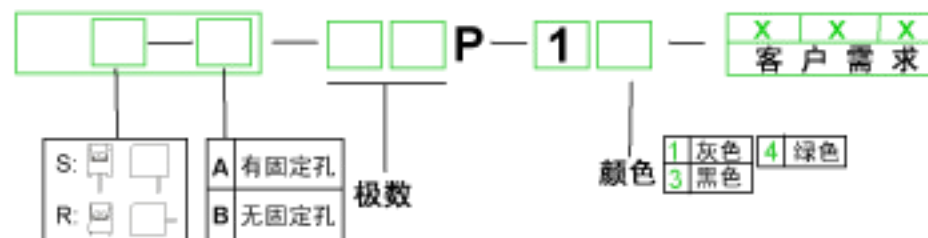

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	13.85	20.30	26.65	33.00	39.35	45.70	52.05	58.40	64.75	71.10	77.45	83.80	90.15	96.50
S(mm)	6.35	12.70	19.05	25.40	31.75	38.10	44.45	50.80	57.15	63.50	69.85	76.20	82.55	88.90
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	102.85	109.20	115.55	121.90	128.25	134.60	140.95	147.30	153.65	160.00	166.35			
S(mm)	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35

 mm (INCH)	 中国·康伟电子有限公司
 NAME	HB635