


康伟栅栏式PCB接线端子



产品规格书




认证	UL	CE
电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	15A	24A
导线线径	22-14AWG	2.5mm ²
耐电压	AC2000V/1Min	
绝缘阻抗	500MΩ/DC500V	
机械性能		
最大锁紧扭力	0.5N.m 4.4Lb.in	
环境温度	-40℃~+105℃	
尺寸		
间距	8.25mm(.325")	
极数	2P-26P	
材质及电镀		
塑件	PA66+23%GF LUL94V-0	
端子	黄铜, 0.8厚 镀锡	
螺丝	铜, M3镀锡	

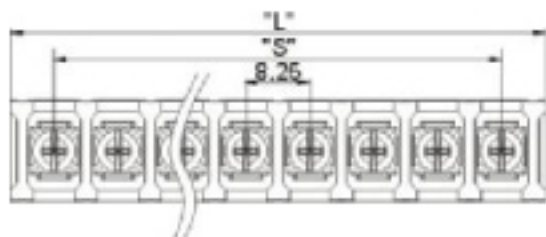

"S"=8.25X(P-1)
"L"=8.25XP+3.18

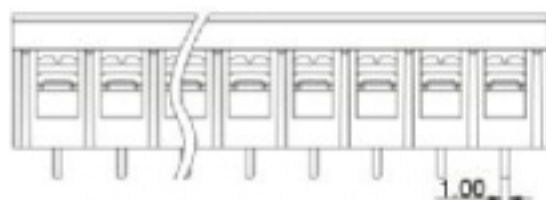

订购方式:

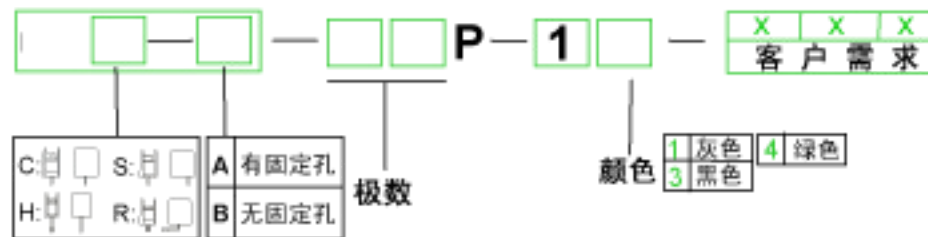

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	19.88	27.93	36.18	44.43	52.68	60.93	69.18	77.43	85.68	93.93	102.18	110.43	118.68	126.93
S(mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	135.18	143.43	151.68	159.93	168.18	176.43	184.68	192.93	201.18	209.43	217.68			
S(mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50

	中国·康伟电子有限公司
	NAME KV35GC-B