
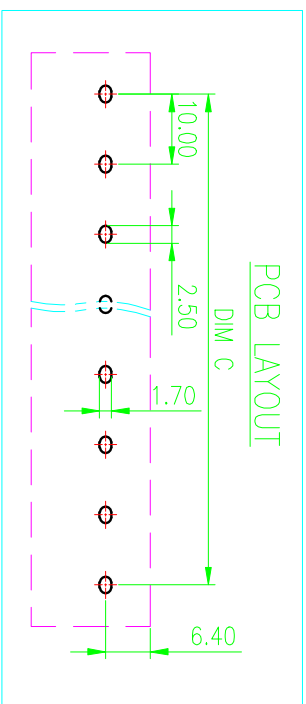

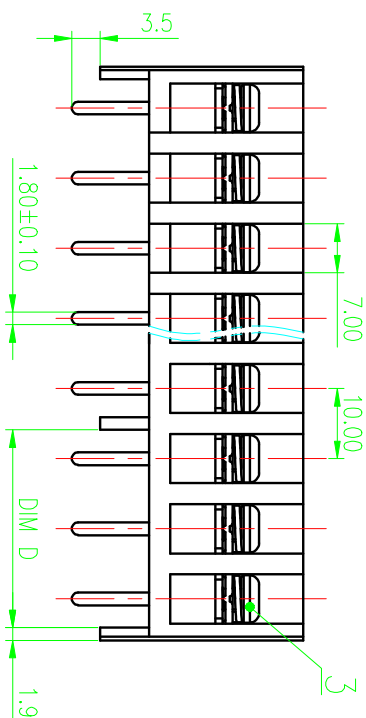



精度等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	±Z	

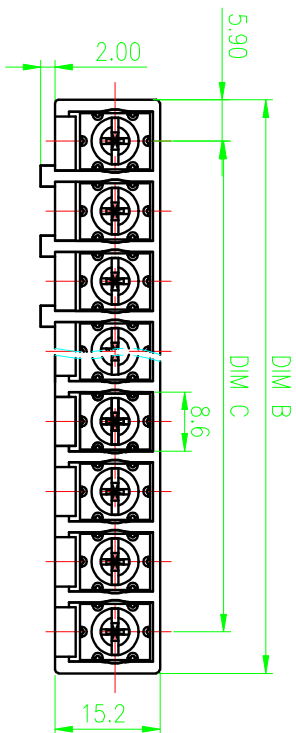

N=NUMBER OF CONCATS

	DIM B	DIM C	DIM D	
06P	61.80±0.30	50.00±0.25	18.30±0.30	0.30
07P	71.80±0.30	60.00±0.25	28.30±0.30	0.35
08P	81.80±0.35	70.00±0.25		0.35
09P	91.80±0.40	80.00±0.30	38.30±0.30	0.40
10P	101.80±0.45	90.00±0.35		0.45

REV	ECN	DESCRIPTION	DRT	DATE

MATERIAL:	
MAT NO.:	
STATUS:	
APPD:	
CHKD:	
DRT: CENGWZ_2019.10.18	
SIZE: A4	
TYPE: CUSTOMER_DRAWING	
DRAWING NO.: KV31B-10	
SCALE: 2:1	
REV	

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/30	300/30	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/特类等	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	600/41	600/41	1000/41
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
额定扭矩/Torque Tightening(N·m/Lbin)	M4: 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	6/18~10		
间距/Pitch(mm)/线径范围/oles	10.0/N=06~10P		
使用温度范围/Operating Temperature(°C)	-40~+120		
符合RoHS环保要求/Conform to RoHS	Yes		
3	Screw	Steel	Zn Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

**康伟电子有限公司**  
KANGWEI WEIELECTRONICS CO.,LTD

NAME: KV31B-10