
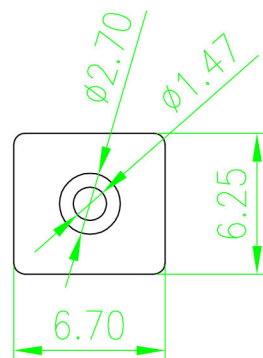
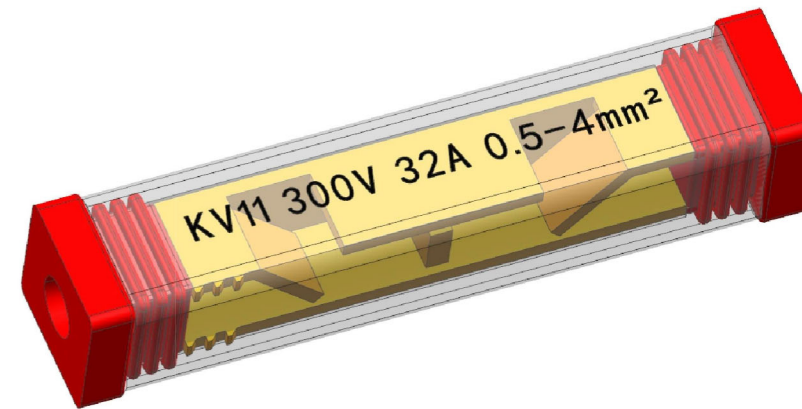
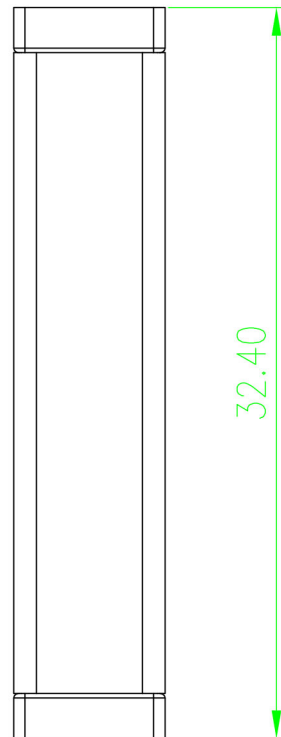


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

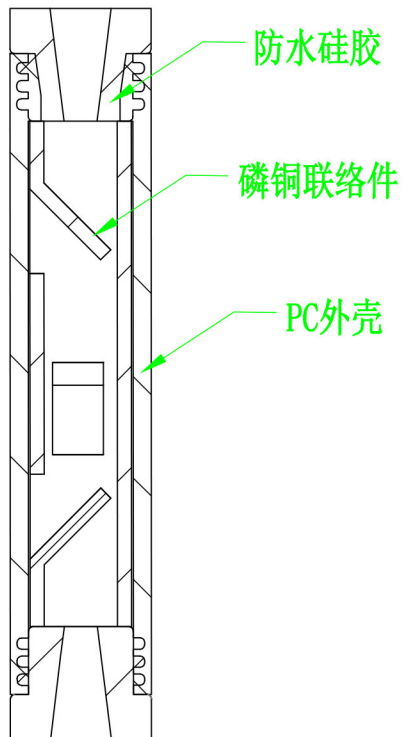

JL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300V/32A	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	300V/32A	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.5-4mm²/20-12AWG		
间距/Pitch(mm)/线数范围/Poles			
剥线长度/Stripping length(mm)	8-9MM		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	SURFACE:		
MAT NO.:	KANGWEI 康伟电子有限公司 KANGWEI ELECTRONICS CO., LTD		
STATUS:	KV11		
APPD: Lan ChH 2023.12.14	NAME:		
CHKD: Yu JZh 2023.12.14	DRAWING NO.: KV11		
DRFT: CENG MZ 2023.12.14	REV		T0-1
SIZE: A4	TYPE: CUSTOMER_DRAWING	SCALE: 2:1	SHEET 1/1